

Mechanical single/dual pressure switch
Repeatability ±1.0% at constant temperature

Features

Metal diaphragm pressure switch
 Wetted parts welded.
 Direct action, no friction, high accuracy

Adjustment ranges

0.012 ... 10.3 bar and
 -0.006 ... -1 bar (Vacuum)

Applications

Petrochemical industry,
 Process technology

Technical Data

Wetted parts:	Stainless steel 17-7PH/SS304
Repeatability:	±1 % at constant temperature
Switching rate:	max. 20/min
Temperature range:	-40 °C... +75 °C
Protection class:	IP65
Housing:	Explosion proof housing, aluminum anodized and lacquered
Process connection:	1/4" NPT female thread Optional: 1/2" NPT female thread (P2)
Electrical connection:	Internal terminal strip (0.5-2.5 mm ²), approved cable gland has to be provided by the customer
Electrical ratings and hysteresis:	A large variety of micro switches offers different electrical ratings and hysteresis for many applications.



Index: D

Weight	D1X-...: approx. 2.7 kg D2X-...: approx. 2.8 kg
Set point adjustment:	Turn the adjustment screw clockwise to decrease the set point
Intrinsically safe:	The switches are designed for intrinsically safe applications. Please add "Exi" to your ordering details when placing an order. To comply with the intrinsically safe approval following max. ratings must not be exceeded: U _{max} = 28 V I _{max} = 50 mA
Approval:	Ex: Ex d II C T6 acc. to ATEX cULus: Class I, Groups B, C, D Class II, Groups E, F, G acc. to Underwriter Laboratories Inc. and Canadian Standard Assn.

Pressure ranges

Pressure range code	Adjustment range [bar]		Max. operating pressure [bar]	Proof pressure [bar] (short term)	Max. hysteresis of switch types in bar (end of range)	
	Increasing press.	Decreasing press.			H, GH [bar]	M, GM [bar]
Overpressure						
3SS	0.012... 0.2	0.002... 0.196	0.5	0.7	0.004	0.010
18SS	0.050... 1.2	0.030... 1.2	3.0	4.0	0.010	0.040
80SS	0.300... 5.5	0.030... 5.3	8.0	10.7	0.100	0.220
150SS	0.500... 10.3	0.100... 9.9	15.0	20.0	0.180	0.400
Vacuum						
3SS	-0.006... -0.2	-0.002... -0.196	0.15	0.2	0.004	0.009
18SS	-0.040... -1.0	-0.020... -0.970	0.5	1.0	0.020	0.060

Specifications are subject to changes without notice.


Pressure

Metal Diaphragm Press. Switches


Type D1X-.../D2X-...

Dimensions (in mm / inch)

Index: D

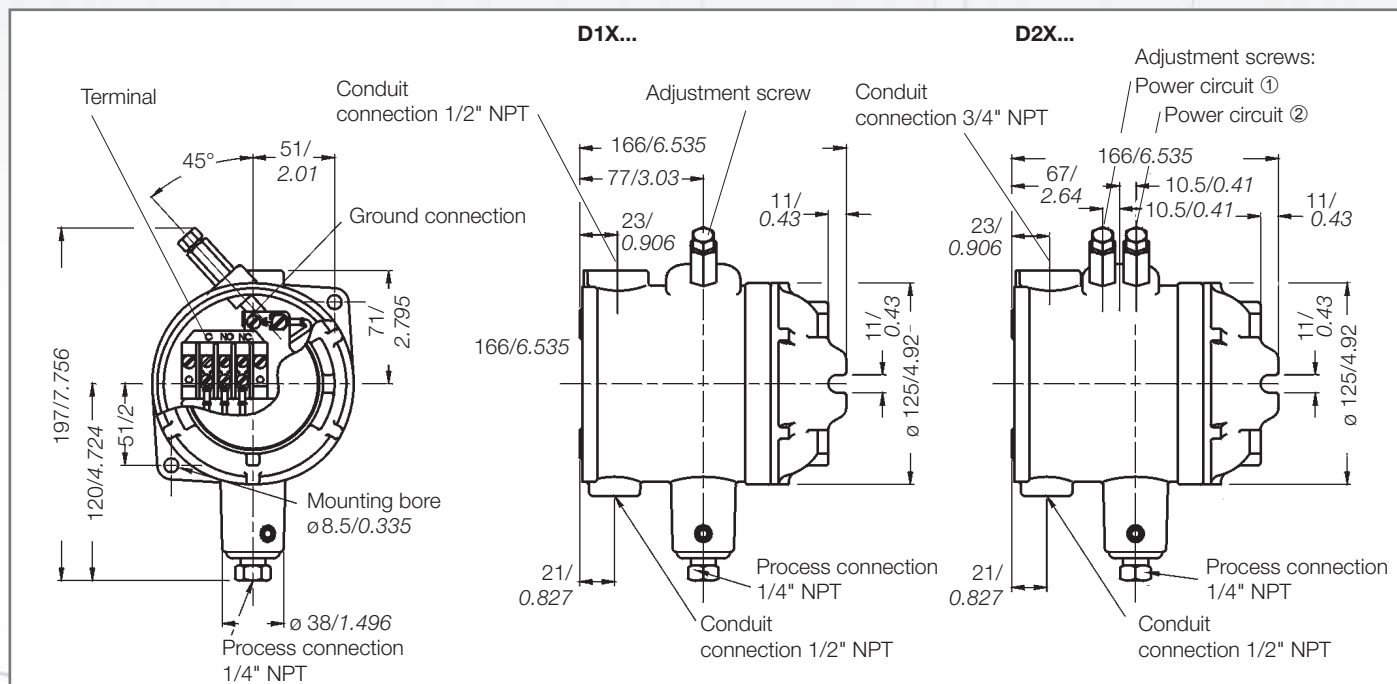

Wiring code for all types (contact status at atmospheric pressure)



Power circuit ①	Power circuit ②
C=purple	C=brown
NC=blue	NC=orange
NO=red	NO=black

at vacuum NC/NO vice versa

Approval

EX	Ex d approval
UL	cULus approval
EXI	Ex i approval

Options

P2 = 1/2" NPT F SS Process connection


Electrical ratings

Micro switch	Special features	Volt AC 50/60 Hz	Ind. load A	Res. load A	Volt DC	Ind. load A	Res. load A	Comments
H	Micro switch with silver contacts	125 250 480*	10 10 3	10 10 3	6 to 24	0.50	0.5	Small hysteresis; High AC / low DC loads
M	Micro switch with silver contacts	125 250 480*	10 10 3	10 10 3	12 24 250	5.00 1.00 0.25	15.0 2.0 0.4	Medium hysteresis; High AC and DC loads
GH	Micro switch with gold-plated contacts for low voltage and/or low current	125	1	1	24	1.00	1.0	Small hysteresis
GM		30	0.1	0.1	30	0.10	0.1	Medium hysteresis

* on request

Ordering

Example for order number



Your order number

